

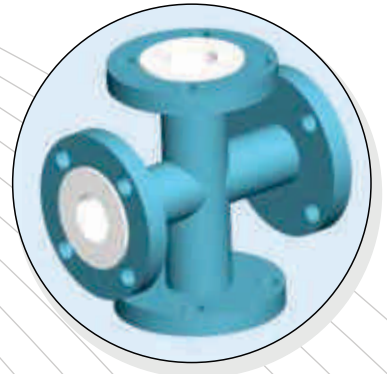
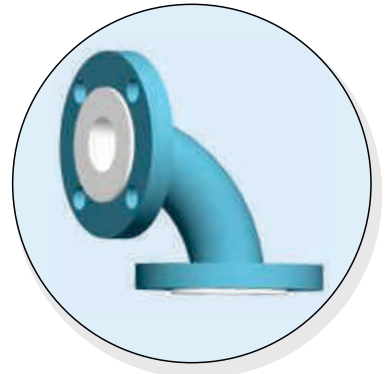
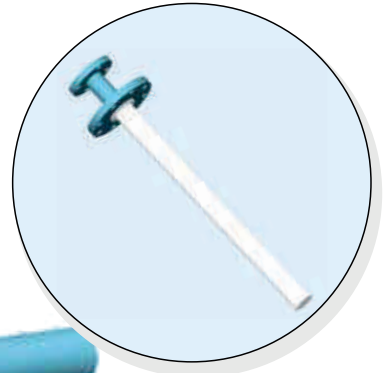



Heta Glass Industries

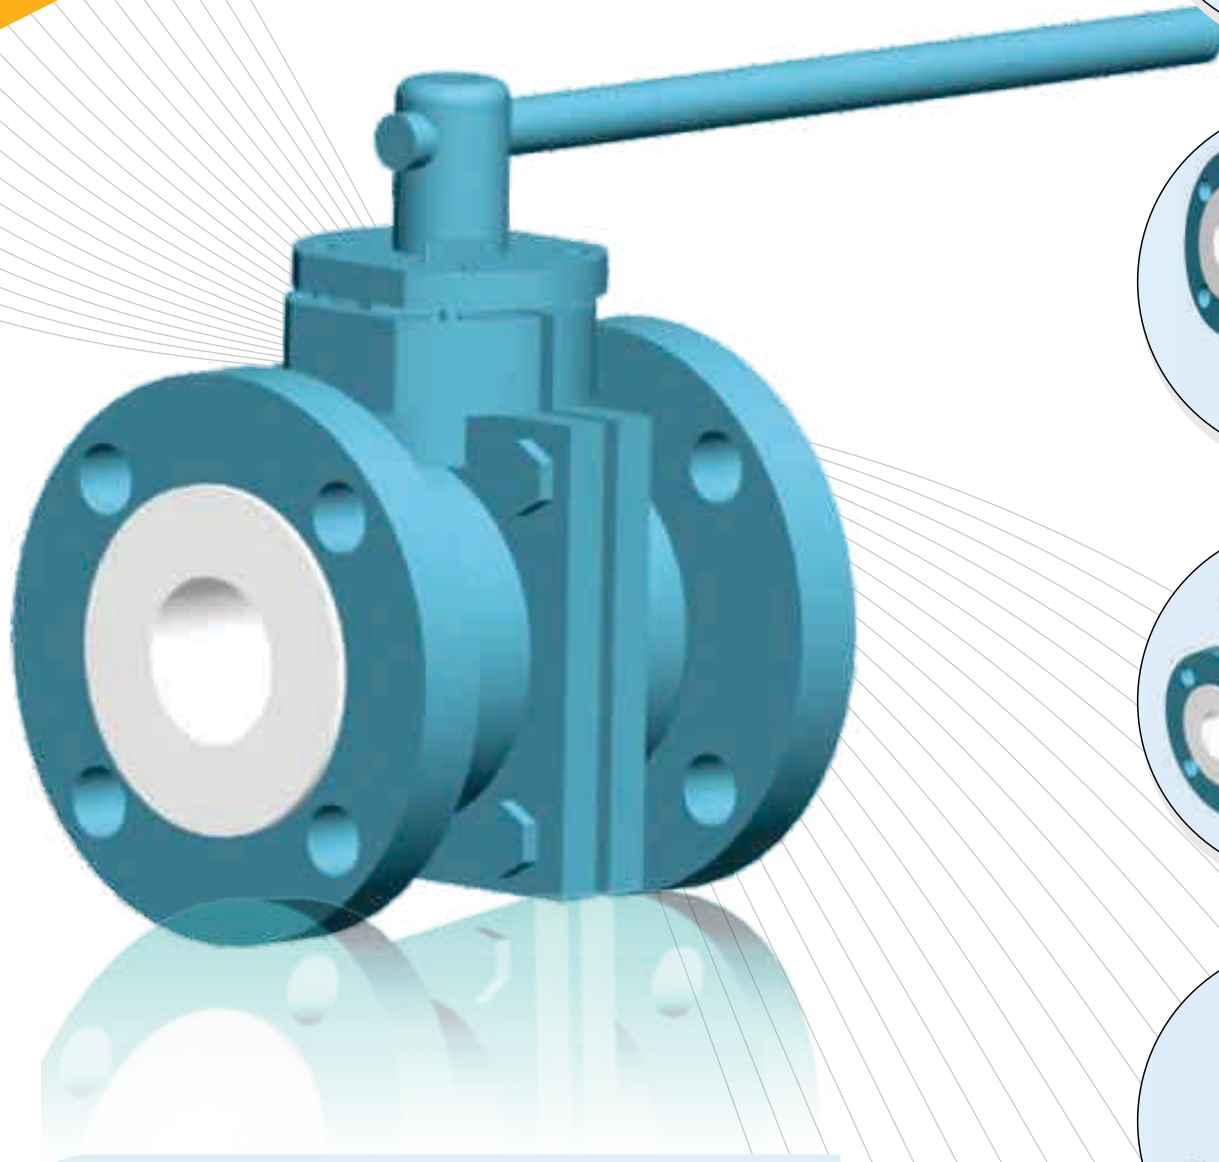

**ULTIMATE SOLUTION FOR
FLUID TRANSMISSION WORLD...**



LINED SPACER

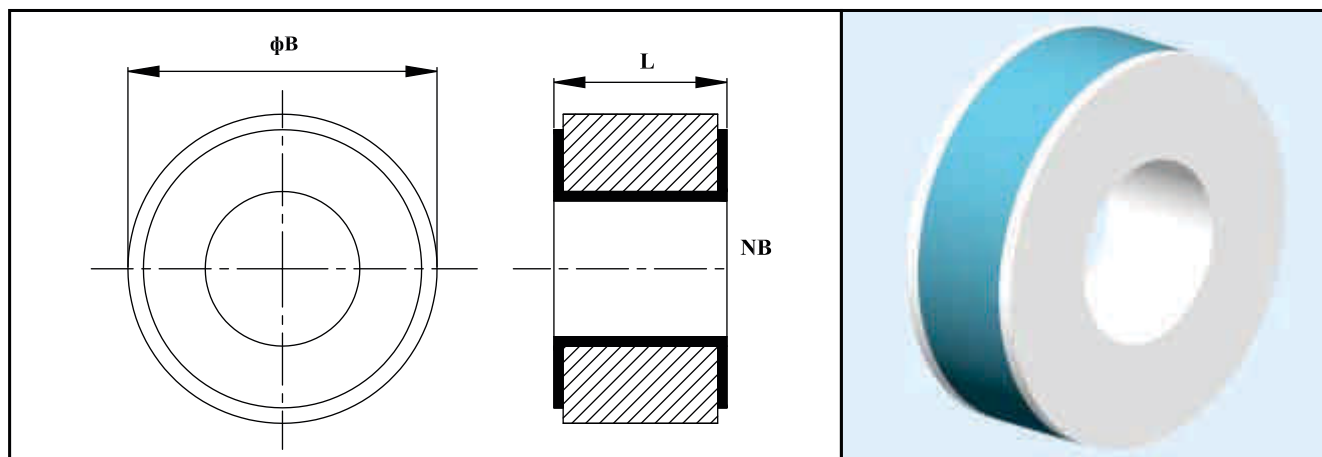

Nominal Bore (NB)		Diameter B	Length(L) Min.	Length(L) Max.	Liner Thickness	Wall Thickness
(mm)	Inches	(mm)	(mm)	(mm)	(mm)	(mm)
25	1	64	26	60	3.3	18.5
40	1.5	83	26	60	3.3	20.7
50	2	102	26	70	3.3	24.5
80	3	133	26	70	3.3	27.8
100	4	171	26	70	4.5	34.8
150	6	219	26	80	5.0	32.5
200	8	275	Upon Request			
250	10	336				
300	12	405				

HOUSING MATERIAL

Body : Made from IS 2062 Plates
 Liner : PTFE in accordance with ASTM D 1457

OPTIONS

Material : Stainless Steel
 Extras : Earthing Studs / Lugs Vent Extensions to suit DIN PN 10/16 BS 10, ASME 300 Flange

TEST & INSPECTION DATA

Spark Test : 15 KV D.C. After Lining

HG

Honesty

Efficiency

Transparency

Ambitions



**Heta Glass
Industries**

Office & Factory :

336/25/A, G.I.D.C., Makarpura, Vadodara-390010

M : 098250 76022, 099789 00795, Ph. : 0265 - 2637622

E-mail : hiren@hetaglass.com • nimesh@hetaglass.com